

Zigbee Inclinator



Vigor Technology

ZigBee Inclinometer

Features

- Performs IEEE802.15.4, frequency 2.4G ISM
- Support star networks and peer-to-peer network, more security
- Radio frequency passed by CE, FCC and other international certifications
- Low power consumption, support 100m or 1km distance
- Patent tilt measurement technology, to achieve true high accuracy




Descriptions

Zigbee inclinometer is based on Vigor's patent tilt measurement technology with Zigbee wireless module which with IEEE802.15.4 standard, to meet wild, unattended, hazardous and confined space applications for remote monitoring and maintenance requirements.

Zigbee inclinometer also has a highly flexible wireless network capability and strong tilt measurement capability:

- ✓ $\pm 0.02\%$ FS linearity
- ✓ $\pm 0.005^\circ$ Offset, realize higher accuracy for platform leveling
- ✓ Combine with gyro module, realize static/dynamic angle measuring
- ✓ Combine with vibration module, realize FFT computations in-time, output vibration frequency and amplitude data directly, eliminate the influence of environment vibration
- ✓ Further confirmed that offset, repeatability, hysteresis, turn on repeatability etc. parameters which are important influence factors to unit total performance evaluation
- ✓ Internal enhanced advanced intelligent algorithms drastically reduce cross-axis error, upgrades real tilt angle measuring accuracy, abandoned the traditional incomplete understanding for tilt angle measurement precision concept
- ✓ Greatly reduce measuring errors when the real tilt direction not consistent for unit's sensitive axis
- ✓ Performs with short-circuit, transient voltage, transposition protection to adapt to industry environment

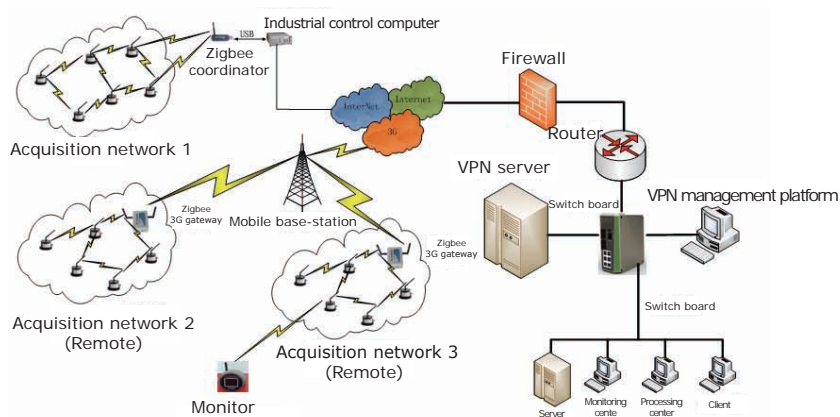

Picture 1 Typical wireless monitoring system with Zigbee

Applications

Factory automation, Instrumentation, Agricultural machinery, Construction machinery, Industrial networks, medical equipment, Civil engineering, Internet of Things

Performances

Table 1 Specifications

Range	±5°	±10°	±15°	±30°	±45°	±60°	
Combined absolute accuracy ^① (@25°C)	±0.01°	±0.015°	±0.02°	±0.04°	±0.06°	±0.08°	
Accuracy subroutine parameter	Absolute linearity (LSF,%FS)	±0.06	±0.03	±0.03	±0.03	±0.02	±0.02
	Cross-axis sensitivity ^②	±0.1%FS					
	Offset ^③	±0.005°			±0.008°		
	Repeatability	±0.0025°					
Hysteresis	±0.0025°						
Allowed installation misalignment ^④	±4.0°	±3.0°	±2.5°	±1.5°	±1.2°	±1.2°	
Input-axis mislignment	≤±0.1°						
Sensitivity temperature drift coefficient(max.)	≤100ppm/°C	≤50ppm/°C					
Offset temperature drift coefficient(max.)	≤0.003°/ °C						
Offset turn on repeatability ^⑤	±0.008°						
Resolution	0.0025°						
Long-term stability(1 year)	≤0.02°						
Measurement axis	1 or 2 axis						
Cold start warming time	60s						
Response time	0.3s(@t90)						
Zigbee interface							
Transfer output power	2mW (+3 dBm), boost mode enable 1.25mW(+1dBm), boost mode off 10mW(+10dBm) request						
Indoor/city range	Up to 133 ft (40 M)						
Outdoor/RF sight distance	Up to 400 ft (120 M)						
RF data rate	250 Kbps						
Operation frequency	2.4 GHz						
Receiver sensitivity	- 96 dBm, boost mode enable - 95 dBm, boost mode off						
Spread spectrum type	16 DSSS						
Network topology	Mesh net, point-to-point protocol, and point to multipoint						
Address Option	PAN ID and addressing, cluster ID and terminal(optional)						
USA(FCC) certification	OUR-XBEE2						
Canada (IC) certification	4214A-XBEE2						
Europe (CE) certification	ETSI						
RoHS	Compatible						
General parameter							
Power supply	9~36VDC						
Debug interface	RS232						
Refresh rate	5Hz, 10Hz, 20Hz						
Power consumption	Average working current≤50mA(25°C&24VDC)						
Operation temperature range	-40~85°C						
Storage temperature range	-60~100°C						
Insulation resistance	100MΩ						
MTBF	≥25000h/tims						
Shock	100g@11ms , three-axis, half-sine						
Vibration	8grms, 20~2000Hz						
Protection	IP65(Optional IP67)						
Connecting	Military class connector(MIL-C-26482)						
Weight	450g(without cable and connector)						

① Combined absolute accuracy means the compositive value of sensor's absolute linearity, repeatability, hysteresis, offset and cross-axis sensitivity error. (in room temperature condition) as

$$\Delta = \pm \sqrt{\text{absolute linearity}^2 + \text{repeatability}^2 + \text{hysteresis}^2 + \text{offset}^2 + \text{cross-axis sensitivity error}^2}$$


② The cross-axis sensitivity means the angle that the tilt sensor may be banked to the normal tilt direction of sensor. The cross-axis sensitivity (±0.1%FS) shows how much perpendicular acceleration or inclination is coupled to the inclinometer output signal. For example, for the single-axis inclinometer with range ±30°(assuming the X-axis as measured tilt direction), when there is a 10° tilt angle perpendicular to the X-axis direction(the actual measuring angle is no change, example as +8.505°), the output signal will generate additional error for this 10° tilt angle, this error is called as cross-axis sensitivity error. SST300's cross-axis sensitivity is 0.1%FS, the extra error is 0.1%×30°=0.03°(max), then real output angle should be +(8.505°±0.03°). In SST300 series, this error has been combined into the absolute accuracy

③ Offset means that when no angle input (such as the inclinometer is placed on an absolute level platform), output of sensor is not equal to zero,the actual output value is zero offset value.

④ Allowed installation misalignment means during the installation, the allowable installation angle deviation between actual tilt direction and sensor's nature measurement direction. In general, when installed,SST300 sensor is required that the measured tilt direction keep parallel or coincident with sensor designated edge, this parameter can be allowed a certain deviation when sensor is installed and does not affect the measurement accuracy.


⑤ Offset turn on repeatability means the repeatability of the sensor in repeated by supply power on-off-on many times.

Dimensions (mm)

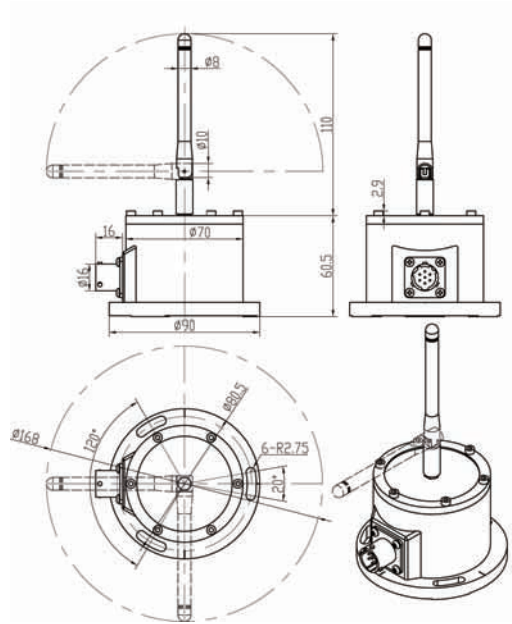

Picture 1 Housing with MIL class connector

Wiring




Picture2 MIL connector socket (View from outside)

Table 2 Pin definition

Pin	Zigbee+RS232
A	Power +
B	Power GND
C	NC
D	NC
E	NC
F	RS232-TXD
G	RS232-RXD

Ordering

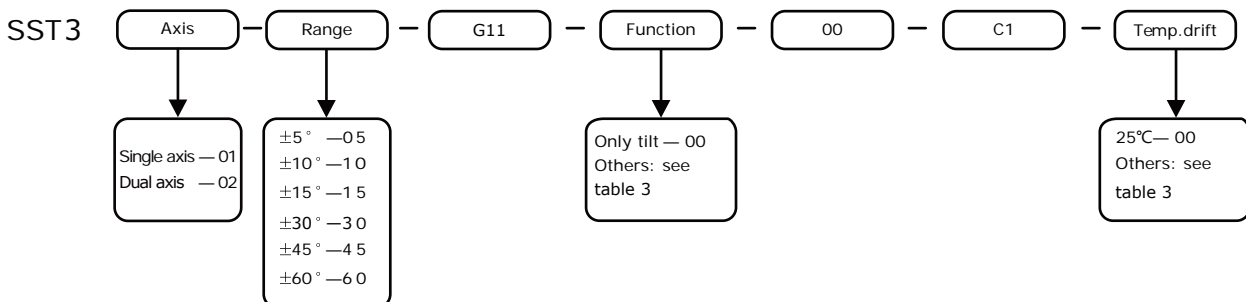

For example, if order a dual-axis Zigbee inclinometer, with range $\pm 15^\circ$, room temperature accuracy $\pm 0.02^\circ$, $-20\sim 60^\circ\text{C}$ accuracy $\pm 0.02^\circ$, output Zigbee interface, 2 meters cable with plug, the model should be chosen as SST302-15-G11-00-00-C1-D3 (2m)

Meanwhile some options: (see table 4)

Zigbee monitor— order number SST003-04-08

Zigbee-USB converter — order number SST003-05-19

Zigbee wireless gateway— order number SST003-05-2

Accessories & Options

Table 3 Accessories

Item	Order Code	Accessories name	Function
Functional Module (Built-in)	F1	GPS module	Positioning accuracy 2.5m CEP; 2.0m @ SBAS Local gravity acceleration automatic revision Time pulse accuracy: 30ns RMS, Original data refresh rate: 4Hz Speed accuracy: 0.1m/s, Receiver type: GPS L1 band, C/A code; Higher positioning accuracy GPS available
	F3	Compass module	Plane compass technology Range: 0~360° Accuracy: $\pm 1.0^{\circ}$RMS, Resolution: 0.01° Hard-iron compensation circuit Higher accuracy or 3D compass module available
	F4	Gyro module	$\pm 100/250/400^{\circ}/s$, X/Y/Z axis dynamic angular rate In-run bias: $\pm 0.02^{\circ}/s$, Non-linearity: 0.1%FS Bandwidth: 50Hz, Noise density : $0.02^{\circ}/s/\sqrt{Hz}$ Higher accuracy gyro module available
	F5	Vibration module	Three-axis vibration detection, frequency response ≤ 5 kHz Range: $0g \sim \pm 1g / \pm 5g / \pm 10g / \pm 20g$, adjustable Sampling(real-time): 20.48 kSPS Filter programmable, 11pcs set points FFT, 512-point, real valued, all three-axis(x, y, z) Storage: 14 FFT records on all three-axis(x, y, z) Alarm programmable, 6 spectrums
Temperature drift	D1	Temperature drift	Temperature compensation range 0~60°C, accuracy $\pm 0.01^{\circ}@ \leq \pm 30^{\circ}$
	D2	Temperature drift	Temperature compensation range 0~60°C, accuracy $\pm 0.01^{\circ}@ > \pm 30^{\circ}$
	D3	Temperature drift	Temperature compensation range -20~60°C, accuracy $\pm 0.02^{\circ}@ \leq \pm 30^{\circ}$
	D4	Temperature drift	Temperature compensation range -20~60°C, accuracy $\pm 0.02^{\circ}@ > \pm 30^{\circ}$
	D5	Temperature drift	Temperature compensation range -30~60°C, accuracy $\pm 0.03^{\circ}@ \leq \pm 30^{\circ}$
	D6	Temperature drift	Temperature compensation range -30~60°C, accuracy $\pm 0.03^{\circ}@ > \pm 30^{\circ}$
	D7	Temperature drift	Temperature compensation range -40~65°C, accuracy $\pm 0.05^{\circ}@ \leq \pm 30^{\circ}$
	D8	Temperature drift	Temperature compensation range -40~65°C, accuracy $\pm 0.05^{\circ}@ > \pm 30^{\circ}$
D9	Temperature drift	Temperature compensation range -40~85°C, accuracy $\pm 0.05^{\circ}@ \leq \pm 30^{\circ}$	
D10	Temperature drift	Temperature compensation range -40~85°C, accuracy $\pm 0.05^{\circ}@ > \pm 30^{\circ}$	

Table 4 Options

Item	P/N	Option name	Function
Monitor	SST003-04-08	Zigbee monitor	Built-in lithium battery with 8 hours supply, single/dual axis, sound/light alarm, alarm point can be set up, 200m distance
Network access facility	SST003-05-15	LAN/WAN converter	According to ITU-T G-703 protocol and 10 Base-T comply with ITU-T G-735 and TU-T G-823 2.048Mbps rate, 2km distance, 1500 V isolation Ethernet port rate 10,100 Mbps, Ethernet full/half-duplex mode, support VLAN MAC address filter: built in 10000 MAC ID
	SST003-05-19	Zigbee-USB converter	USB interface, support hot plug and port power supply Online configuration function, support sleep mode Support 128 bit AES Wireless data encryption Support 65536 nodes Compatible IEEE 802.15.4/ZigBee protocol 2.4 GHz ISM and 780M WPAN frequency range With 2dBi antenna, visual distance reach 300-1000 m Support point-to-point, star, tree and Mesh networks
	SST003-05-20	Zigbee wireless gateway	Visual distance reach 2000m Based on Web management, easy-to-use Support star, tree, chain and MESH network Up to 4-channel ZigBee Provide RS232, wired Ethernet, Wi-Fi and GPRS access Own RTC function, automatically synchronize Automatic CSMA-CA /address filtering/frame retransmission/confirm functions Safety certification, AES128 data encryption
Power	SST003-09-02	Portable battery packs	Output 24VDC, Continuous work 24 hours, IP65, rechargeable
	SST003-09-03	Complementary power combined with solar and wind energy	Solar and wind energy, Day & night working Wind input power 0.6KW; solar input power 0.3KW Battery rated voltage 24V; AC output power 1KW, 220VAC DC output: 24VDC@1A
Installation	SST003-01-01	Magnetic base	50kg suction, permanent magnet, stainless steel materials
	SST003-01-04	Adjustable base with micrometer screw	Three points adjustment, resolution 0.001mm, stainless steel material

RS
CAN
CANopen
Ethernet
DeviceNet
Profi-bus
HART
Ethernet
USB
Zigbee
Wi-Fi
GPRS
CDMA
SSI
PWM
Vibration-wire
Switch
Analog

Shanghai Vigor Technology Development Co., Ltd.

No.289-4, Bisheng Road, Pudong New District Shanghai China 201204

Hotline. +86-400-0505-021

Tel. +86-21-5840-4921

Fax. +86-21-5835-4552

Email: sales@vigordigital.com

Web: www.vigordigital.com